


**MUOVISET KAAPELITIIVISTEET
VEDONPOISTAJALLA**
Tyyppi: HSK-K

- Polyamidi (PA) , UL 94 paloluokka V0
- IP 68 / 10 bar
- -40 °C ... +100 °C (hetkellisesti 120 °C)
- Harmaa RAL 7035




TS Koodi	Valmistajan Koodi	Pk	Kaapeli Ø mm	Pakkaus kpl
1080814095	1 209 0700 14	7	3 - 6,5	50
1080814096	1 209 0900 14	9	4 - 8	50
1080814097	1 209 1100 14	11	5 - 10	50
1080814098	1 209 1300 14	13,5	6 - 12	50
1080814099	1 209 1600 14	16	10 - 14	50
1080814100	1 209 2100 14	21	13 - 18	50
1080814101	1 209 2900 14	29	18 - 25	25
1080814102	1 209 3600 14	36	22 - 32	10
1080814103	1 209 4200 14	42	32 - 38	5
	1 209 4800 14	48	37 - 44	5

TS Koodi	Valmistajan Koodi	Metr.	Kaapeli Ø mm	Pakkaus kpl
1080814087	1 209 1200 50	M12	3 – 6,5	50
1080814088	1 209 1600 50	M16	4 – 8	50
1080814089	1 209 2000 50	M20	6 – 12	50
1080814090	1 209 2500 50	M25	13 – 18	50
1080814091	1 209 3200 50	M32	18 – 25	25
1080814092	1 209 4000 50	M40	22 – 32	10
1080814093	1 209 5000 50	M50	32 – 38	5
1080814094	1 209 6300 50	M63	37 – 44	5

MUOVISET KAAPELITIIVISTEET

- Polystyreeni
- IP 54
- DIN 46320




TS Koodi	Valmistajan Koodi	Pk	Kaapeli Ø mm	Pakkaus kpl
	G1720507	7	5 – 7	100
	G1720509	9	6 – 8	100
	G1720511	11	8 – 10	50
	G1720513	13,5	10 – 12	50
	G1720516	16	12 – 14	50
	G1720521	21	15 – 17	50
	G1720529	29	18 – 25	50
	G1720536	36	25 – 32	20
	G1720542	42	30 – 38	10
	G1720548	48	34 – 42	10

** = varastointi lopetetaan

MUOVISET VASTAMUTTERIT
Tyyppi: GM-FS


- Polyamidi (PA)
- -40 °C ... +100 °C
- Harmaa RAL 7035



TS Koodi	Valmistajan Koodi	Pk / Metr.	Paksuus/Avain mm	Pakkaus
	1 262 0700 11	7	5 / 19	100
1080814112	1 262 0900 11	9	5 / 22	100
1080814113**	1 262 1100 11	11	5 / 24	100
1080814114	1 262 1300 11	13,5	6 / 27	100
1080814115	1 262 1600 11	16	6 / 30	100
1080814116	1 262 2100 11	21	7 / 36	100
	1 262 2900 11	29	7 / 46	50
	1 262 3600 11	36	8 / 60	25
	1 262 4200 11	42	8 / 65	25
	1 262 4800 11	48	8 / 70	25
1080814104	1 262 1200 50	M12	5 / 17	100
1080814105	1 262 1600 50	M16	5 / 22	100
1080814106	1 262 2000 50	M20	6 / 27	100
1080814107	1 262 2500 50	M25	7 / 36	100
1080814108	1 262 3200 50	M32	7 / 41	50
1080814109	1 262 4000 50	M40	7 / 50	25
1080814110	1 262 5000 50	M50	8 / 60	25
1080814111	1 262 6300 50	M63	8 / 75	25

MUOVISET SULKUTULPAT
Tyyppi: V-N-FS


- Pk tyypit polystyreeniä , -20 °C ... + 70 °C
- Metr. tyypit polyamidia, -40 °C ... + 100 °C
- IP 54
- harmaa RAL 7035



TS Koodi	Valmistajan Koodi	Pk / Metr.	Korkeus / Ø mm	Pakkaus
	1 252 0700 10	7	8 / 15	100
	1 252 0900 10	9	9 / 19	100
1080814123	1 252 1100 10	11	9 / 22	100
1080814124	1 252 1300 10	13,5	9,5 / 25	100
1080814125	1 252 1600 10	16	9,5 / 27	100
1080814126	1 252 2100 10	21	11 / 33	100
	1 252 2900 10	29	12 / 44	100
	1 252 3600 10	36	15 / 55	25
	1 252 4200 10	42	16 / 62	25
	1 252 4800 20	48	16 / 69	25
1080814117	1 251 1200 50	M12		100
1080814118	1 251 1600 50	M16		100
1080814119	1 251 2000 50	M20		100
1080814120	1 251 2500 50	M25		100
1080814121	1 251 3200 50	M32		100
1080814122	1 251 4000 50	M40		25
	1 251 5000 50	M50		25
	1 251 6300 50	M63		25



MUOVISET KAAPELITIIVISTEET
VEDONPOSTAJALLA JA MURTOSUOJALLA
Tyyppi: HSK-Flex

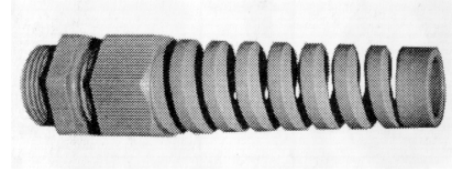

- Polyamidi (PA)
- IP 68 / 10 bar
- -40°C ... + 100 °C , lyhytaikaisesti 120 °C
- harmaa RAL 7035

TS Koodi	Valmistajan Koodi	Pk / Metr.	Kaapeli Ø mm	Pakkaus
1080814127	1 293 0700 14	7	3 – 6,5	50
1080814128	1 293 0900 14	9	4 – 8	50
	1 293 1100 14	11	5 – 10	50
1080814130	1 293 1300 14	13,5	6 – 12	50
1080814131	1 293 1600 14	16	10 – 14	25
	1 293 2100 14	21	13 – 18	20
	1 293 1200 50	M12	3 – 6,5	50
	1 293 1600 50	M16	4 – 8	50
	1 294 1600 50	M16	5 – 10	50
	1 293 2000 50	M20	6 – 12	50
	1 294 2000 50	M20	10 – 14	30
	1 293 2500 50	M25	13 - 18	20

VET KALVOTIIVISTEET



- Musta eteeni-propeenikumi (EPDM)
- IP 67

TS Koodi	Valmistajan Koodi	Asennus-aukon Ø / mm	Kaapeli Ø / mm	Pakkaus
	VET 7 – 10 CR	19	7 – 10	50
1080814134	VET 10 – 14 CR	23	10 – 14	50
1080814135	VET 14 – 20 CR	29	14 – 20	50
	VET 20 – 26 CR	38	20 – 26	25
	VET 26 – 35 CR	48	26 – 35	25